

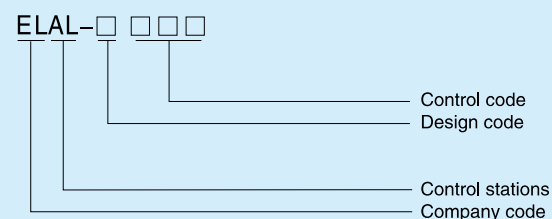


ELAL-B Series Control Station

TECHNICAL DATA

ELAL-B series control stations are utilized in industrial controlling circuits of AC 50Hz or 60Hz, with rated working voltage up to 380V, and rated DC working current up to 220V, to act as the controller of magnetic controllers, contactors, relays and other electrical circuits. Buttons with indicator light can also be used under the condition of light signal indicating. The products conform to IEC60947-5-1 standards.

Type Designation



Control Station

Specifications



ELAL-B101



ELAL-B112








ELAL-B164




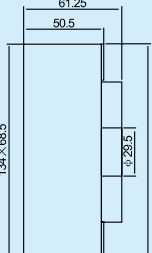


ELAL-J174H29



ELAL-J188H29

Type	Description	Contact	Marking on legend	Marking on push button	Contour
ELAL-B101H29 ELAL-B102 ELAL-B103 ELAL-B101 ELAL-B111H29 ELAL-B114	1 green ush pushbutton spring return	N/O	Start - - Stop -	- I Start - - Stop	
ELAL-B112	1 red ush pushbutton spring return	N/C	-	O	
ELAL-B164H29 ELAL-B164	1 red mushroom head pushbutton 40mm, latching Turn to release	N/C	Energiebct Stop -	-	
ELAL-J174 ELAL-J174H29	1 red mushroom head pushbutton 40mm, Key releade (Key n445)	N/C		Red Red	
ELAL-J184	1 selector switch 2-position stay put standard black handle	N/C		Red	

Control Station	Specifications					
	Type	Description	Contact	Marking on legend	Marking on push button	Contour
 ELAL-B132H29	ELAL-B132H29 ELAL-B134H29	2 spring return push button 1 ush green 1 ush red	N/O	Stop start O	- -	
 ELAL-B213	ELAL-B21H29 ELAL-B214H291 ELAL-B213 ELAL-B215	2 spring return push button 1 ush green 1 ush red	N/O+N/C	Open Close Stop Start - O Stop Start	- - - -	
 ELAL-B222	ELAL-B142H29 ELAL-B144H29	2 spring return push button (black arrow) 1 ush back(white arrow)	N/O+N/C	- -	- -	
 ELAL-B334	ELAL-B324 ELAL-B334	3 spring return push button 1 ush white (black arrow) 1 ush red 1 ush back (white arrow)	N/O + N/C + N/O	- - - - -	- - - - -	
 ELAL-B339	ELAL-B339 ELAL-B321H29	3 spring return push button 1 ush green 1 ush red 1 ush green	N/O + N/C + N/O	- - UP Stop Down	- - - - -	