



RING INSULATED TERMINALS

Lead section: 0.5~1.5mm²(22-16) max current=19A




ITEM NO.	Number of ANSI bolt	Diameter of bolt Mouth d2 φ	B (mm)	L (mm)	F (mm)	H (mm)	D φ (mm)	Color
RV1.25-3	#4	3.2mm	5.7	17.8	4.95	10.0	4.3	red
RVS1.25-3.5	#6	3.7mm	5.7	17.8	4.95			
RVM1.25-3.5	#6	3.7mm	6.6	20.1	6.3			
RVL1.25-3.5	#6	3.7mm	8.0	21.5	7.0			
RVS1.25-4	#8	4.3mm	6.6	20.1	6.3			
RVL1.25-4	#8	4.3mm	8.0	21.5	7.0			
RV1.25-5	#10	5.3mm	8.0	21.5	7.0			
RV1.25-6	1/4	6.5mm	11.6	27.5	11.1			
RV1.25-8	5/16	8.4mm	11.6	27.5	11.1			
RV1.25-10	3/8	10.5mm	13.6	31.6	13.9			

Lead section: 1.5,-2.5mm²(16~14) max current=27A

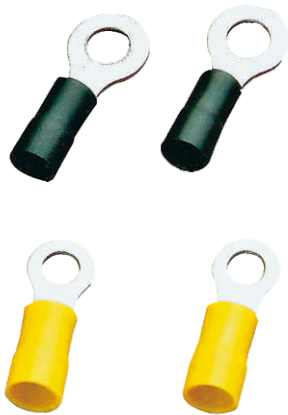

ITEM NO.	Number of ANSI bolt	Diameter of bolt Mouth d2 φ	B (mm)	L (mm)	F (mm)	H (mm)	D φ (mm)	Color
RV2-3	#4	3.2mm	6.6	17.8	4.3	10.0	4.9	blue
RVS2-3.5	#6	3.7mm	6.6	17.8	4.3			
RVM2-3.5	#6	3.7mm	6.6	21.0	7.0			
RVL2-3.5	#6	3.7mm	8.5	22.5	7.75			
RVS2-4	#8	4.3mm	6.6	21.0	7.0			
RVL2-4	#8	4.3mm	8.5	22.5	7.75			
RVS2-5	#10	5.3mm	8.5	22.5	7.75			
RVL2-5	#10	5.3mm	9.5	22.5	7.25			
RV2-6	1/4	6.5mm	12.0	27.6	11.0			
RV2-8	5/16	8.4mm	12.0	27.6	11.0			
RV2-8	3/8	10.5mm	13.6	30.2	13.9			

Lead section: 2.5~4mm²(14~12) max current=37A

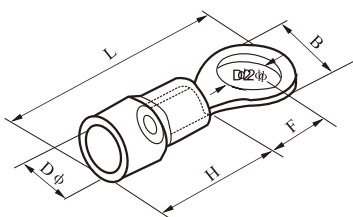

ITEM NO	Number of ANSI bolt	Diameter of bolt mouth d2 φ	B (mm)	L (mm)	F (mm)	H (mm)	D φ (mm)	Color
RV3.5-4	#8	4.3mm	8.0	24.5	7.7	12.5	6.2	black
RVS3.5-5	#10	5.3mm	8.0	24.5	7.7			
RVL3.5-5	#10	5.3mm	12.0	27.9	7.7			
RV3.5-6	1/4	6.5mm	12.0	27.9	7.7			

Lead section: 4-6mm²(12-10) max current=48A

ITEM NO.	Number of ANSI bolt	Diameter of bolt Mouth d2 φ	B (mm)	L (mm)	F (mm)	H (mm)	D φ (mm)	Color
RV5.5-3.5	#6	3.7mm	7.2	21.4	5.9	12.5	6.7	Yellow
RVS5.5-4	#8	4.3mm	7.2	21.5	5.9			
RVL5.5-4	#8	4.3mm	9.5	25.5	8.3			
RV5.5-5	#10	5.3mm	9.5	25.5	8.3			
RV5.5-6	1/4	6.5mm	12.0	31.5	13.0			
RV5.5-8	5/16	8.4mm	15.0	33.7	13.7			
RV5.5-10	3/8	10.5mm	15.0	33.7	13.7			
RV5.5-12	1/2	13.0mm	19.2	38.1	16.0			