


PG-M CABLE GLAND



AG PG	$\varnothing$ mm	GL mm	GL mm	H mm	$\varnothing$ mm
7	3-6.5	5	10	19	14
7	2-5	5	10	19	14
9	4-8	6	10	20	17
9	2-6	6	10	20	17
11	5-10	6	10	21	20
11	3-7	6	10	21	20
13.5	6-12	6.5	10	22	22
13.5	5-9	6.5	10	22	22
16	10-14	6.5	10	23	24
16	7-12	6.5	10	23	24
21	13-18	7	12	25	30
21	9-16	7	12	25	30
29	18-25	8	12	29	40
29	13-20	8	12	29	40
36	22-32	8	15	35	50
36	20-26	8	15	35	50
42	32-38	9	15	37	57
42	25-31	9	15	37	57
48	37-44	10	15	38	64
48	29-35	10	15	38	64

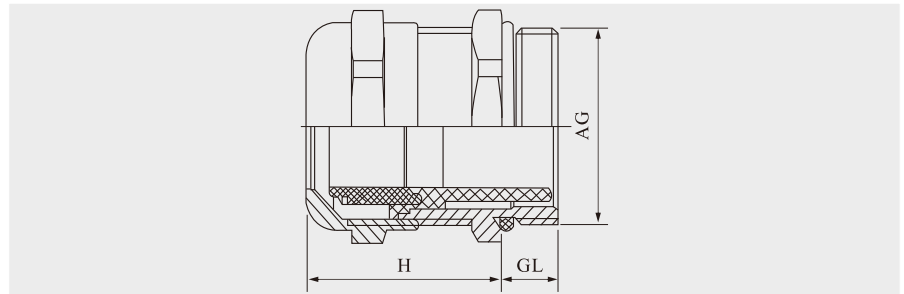

SM INSULATING CONNECTORS

Style	Tensile strength (lbs)	Torque strength (ft lbs)	Voltage withstand(kv)	Screw(mm)	Weight(g)
SM-25	500	6	6	6	28
SM-30	550	8	8	8	44
SM-35	600	10	10	8	50
SM-40	650	10	12	8	56
SM-51	1000	20	15	8	83
SM-76	1500	40	25	10	233